


柔性吸能安全防護系統 解決方案

ONE-STOP SOLUTION OF
FLEXIBLE PROTECTION SYSTEM

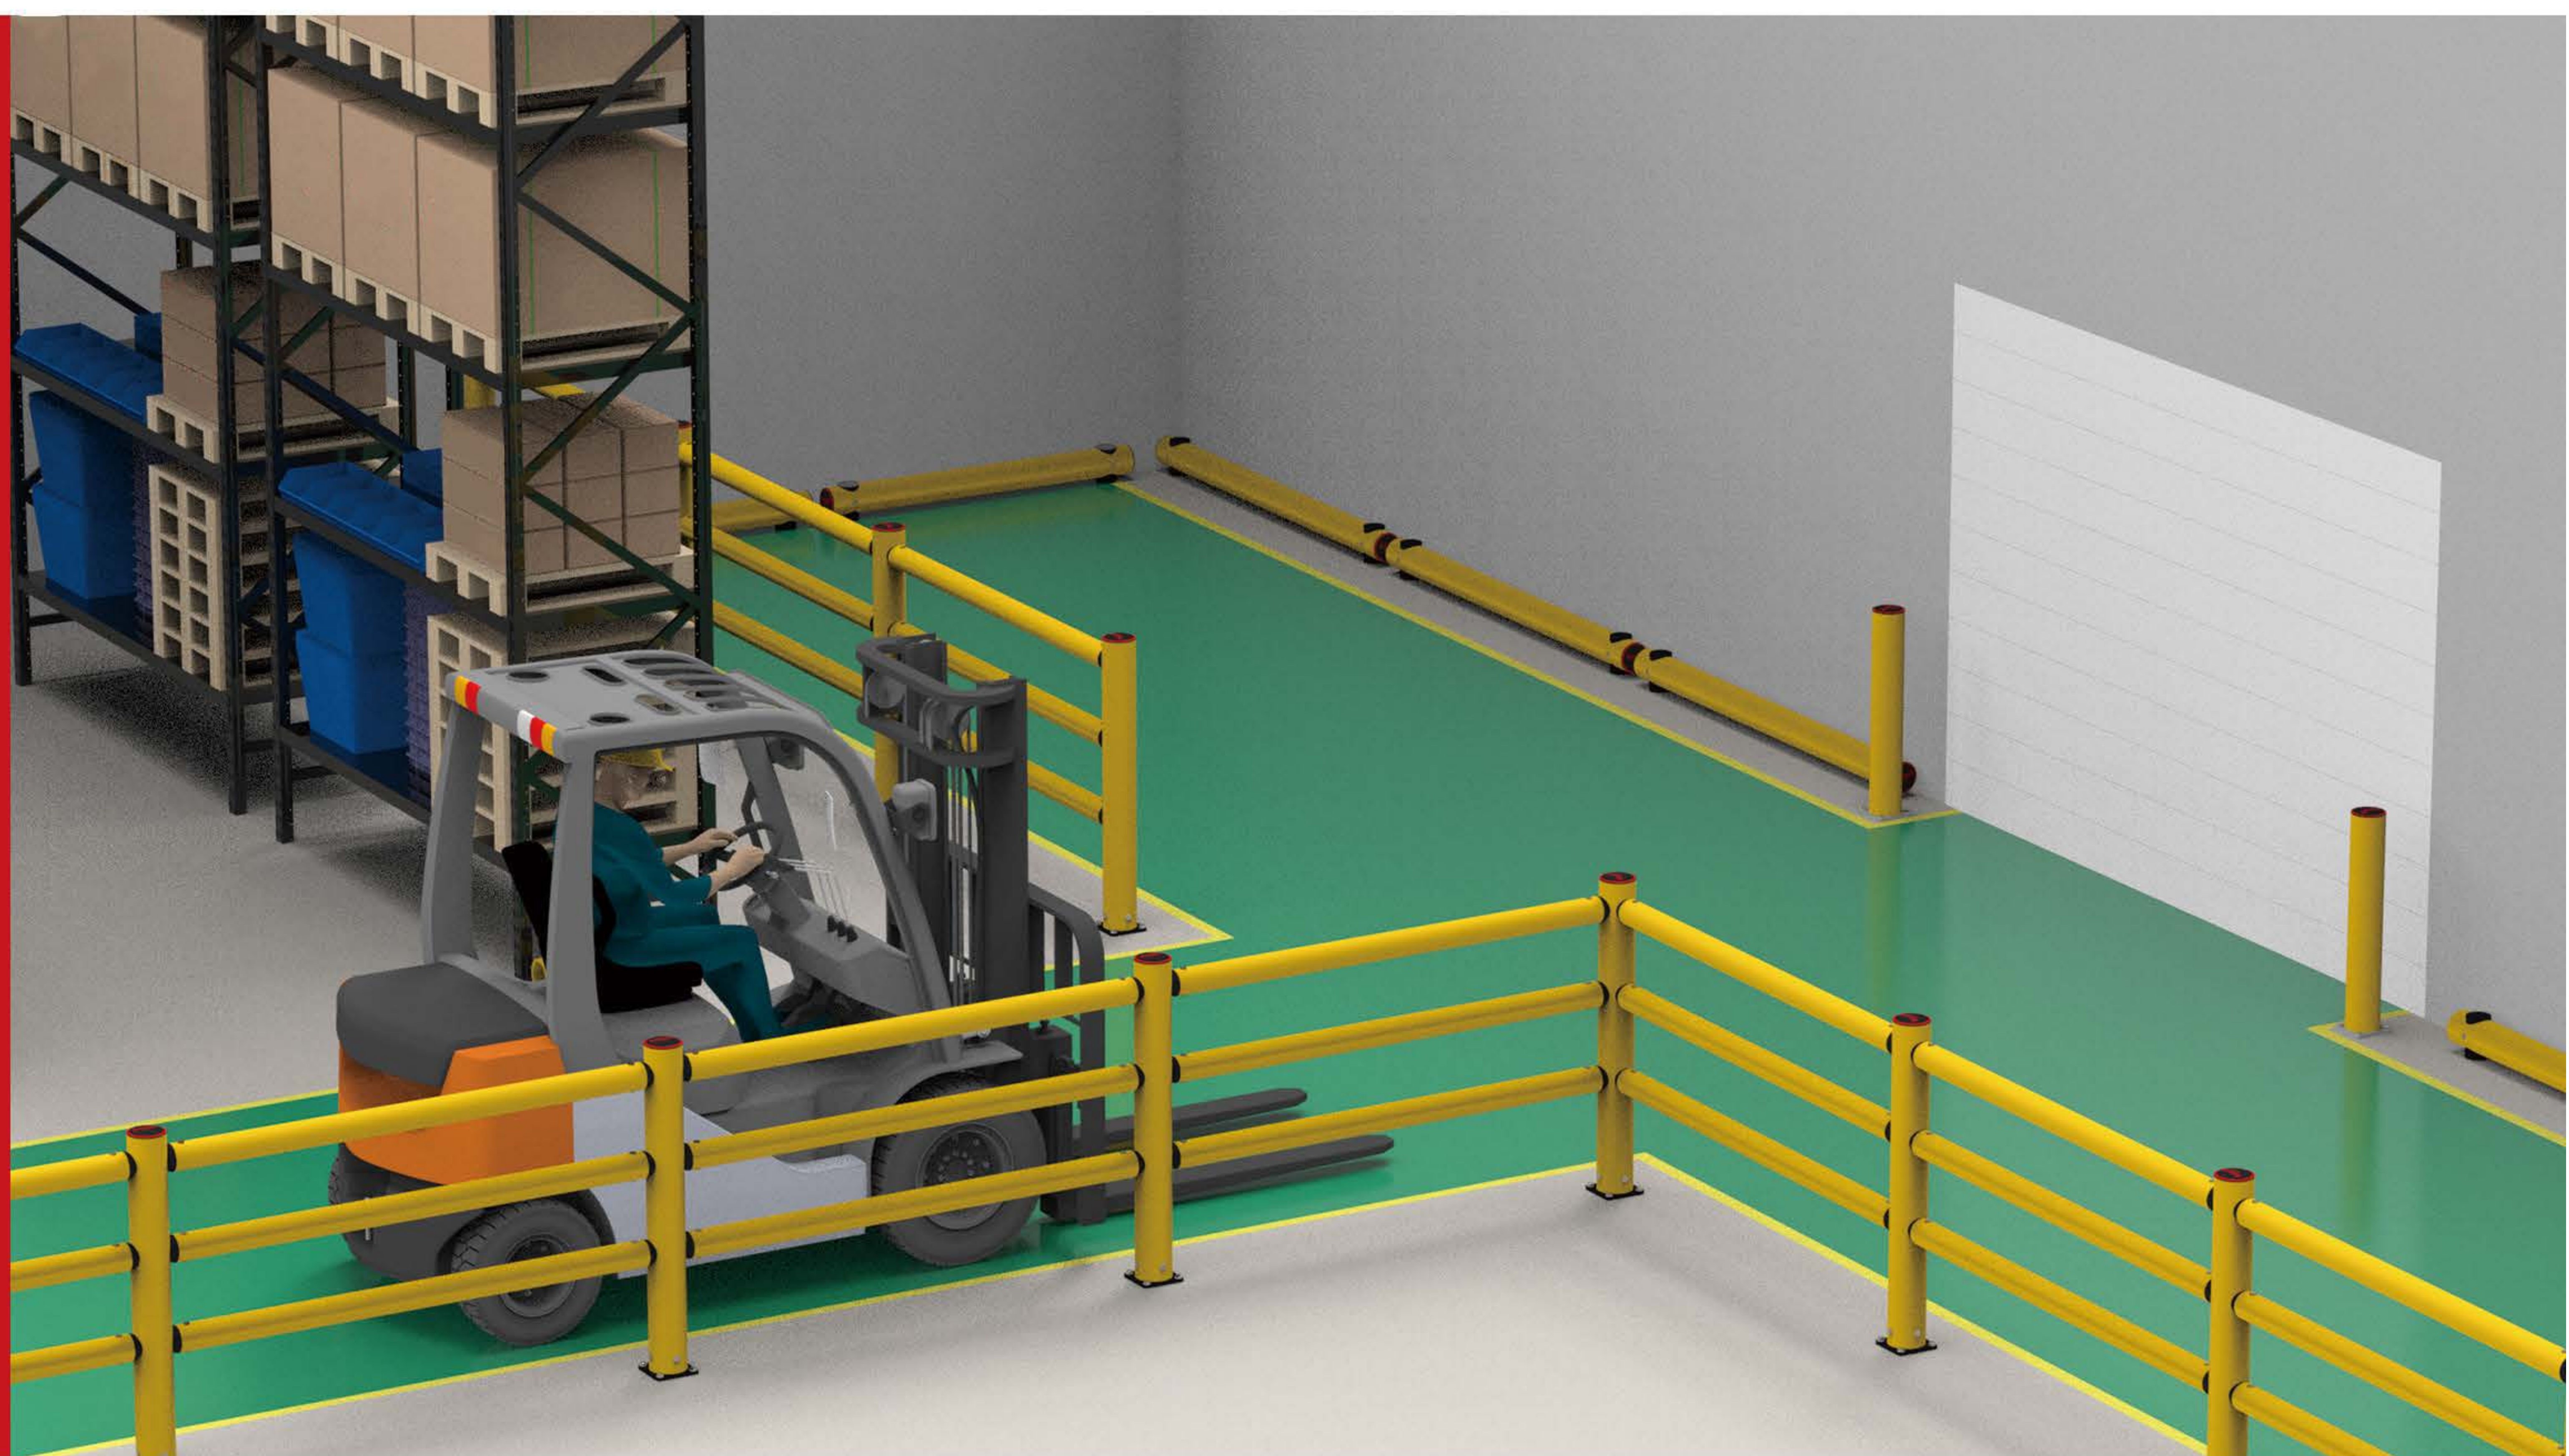

產品特性

PRODUCT FEATURES



◆ 突出的防護能力 | OUTSTANDING PROTECTION CAPABILITY

由進口高分子材料製成的”柔”性護欄在承受撞擊時可通過變形吸收能量並在撞擊結束時回彈至初始狀態，”柔”而長遠，”護”而全面，不僅保護您的人員、財產安全，更降低了日常維護費用。


The "flexible" barrier made of imported polymer materials can absorb energy through deformation during impact and rebound to the initial state after impact. It is "flexible" and long-term, "protective" and comprehensive, not only protecting your personnel and property, but also greatly reducing the cost of daily maintenance.



◆ 專業的分體設計 | PROFESSIONAL SPLIT DESIGN

模組化分體設計結構讓產品安裝更高效，使用方式更靈活。獨特的彈性連接件在連接立柱與橫梁的同時還可實現多種組合方式。

The modular split design structure makes the product installation more efficient and the usage more flexible. The unique elastic connector can realize various combinations while connecting the bollard and the beam.

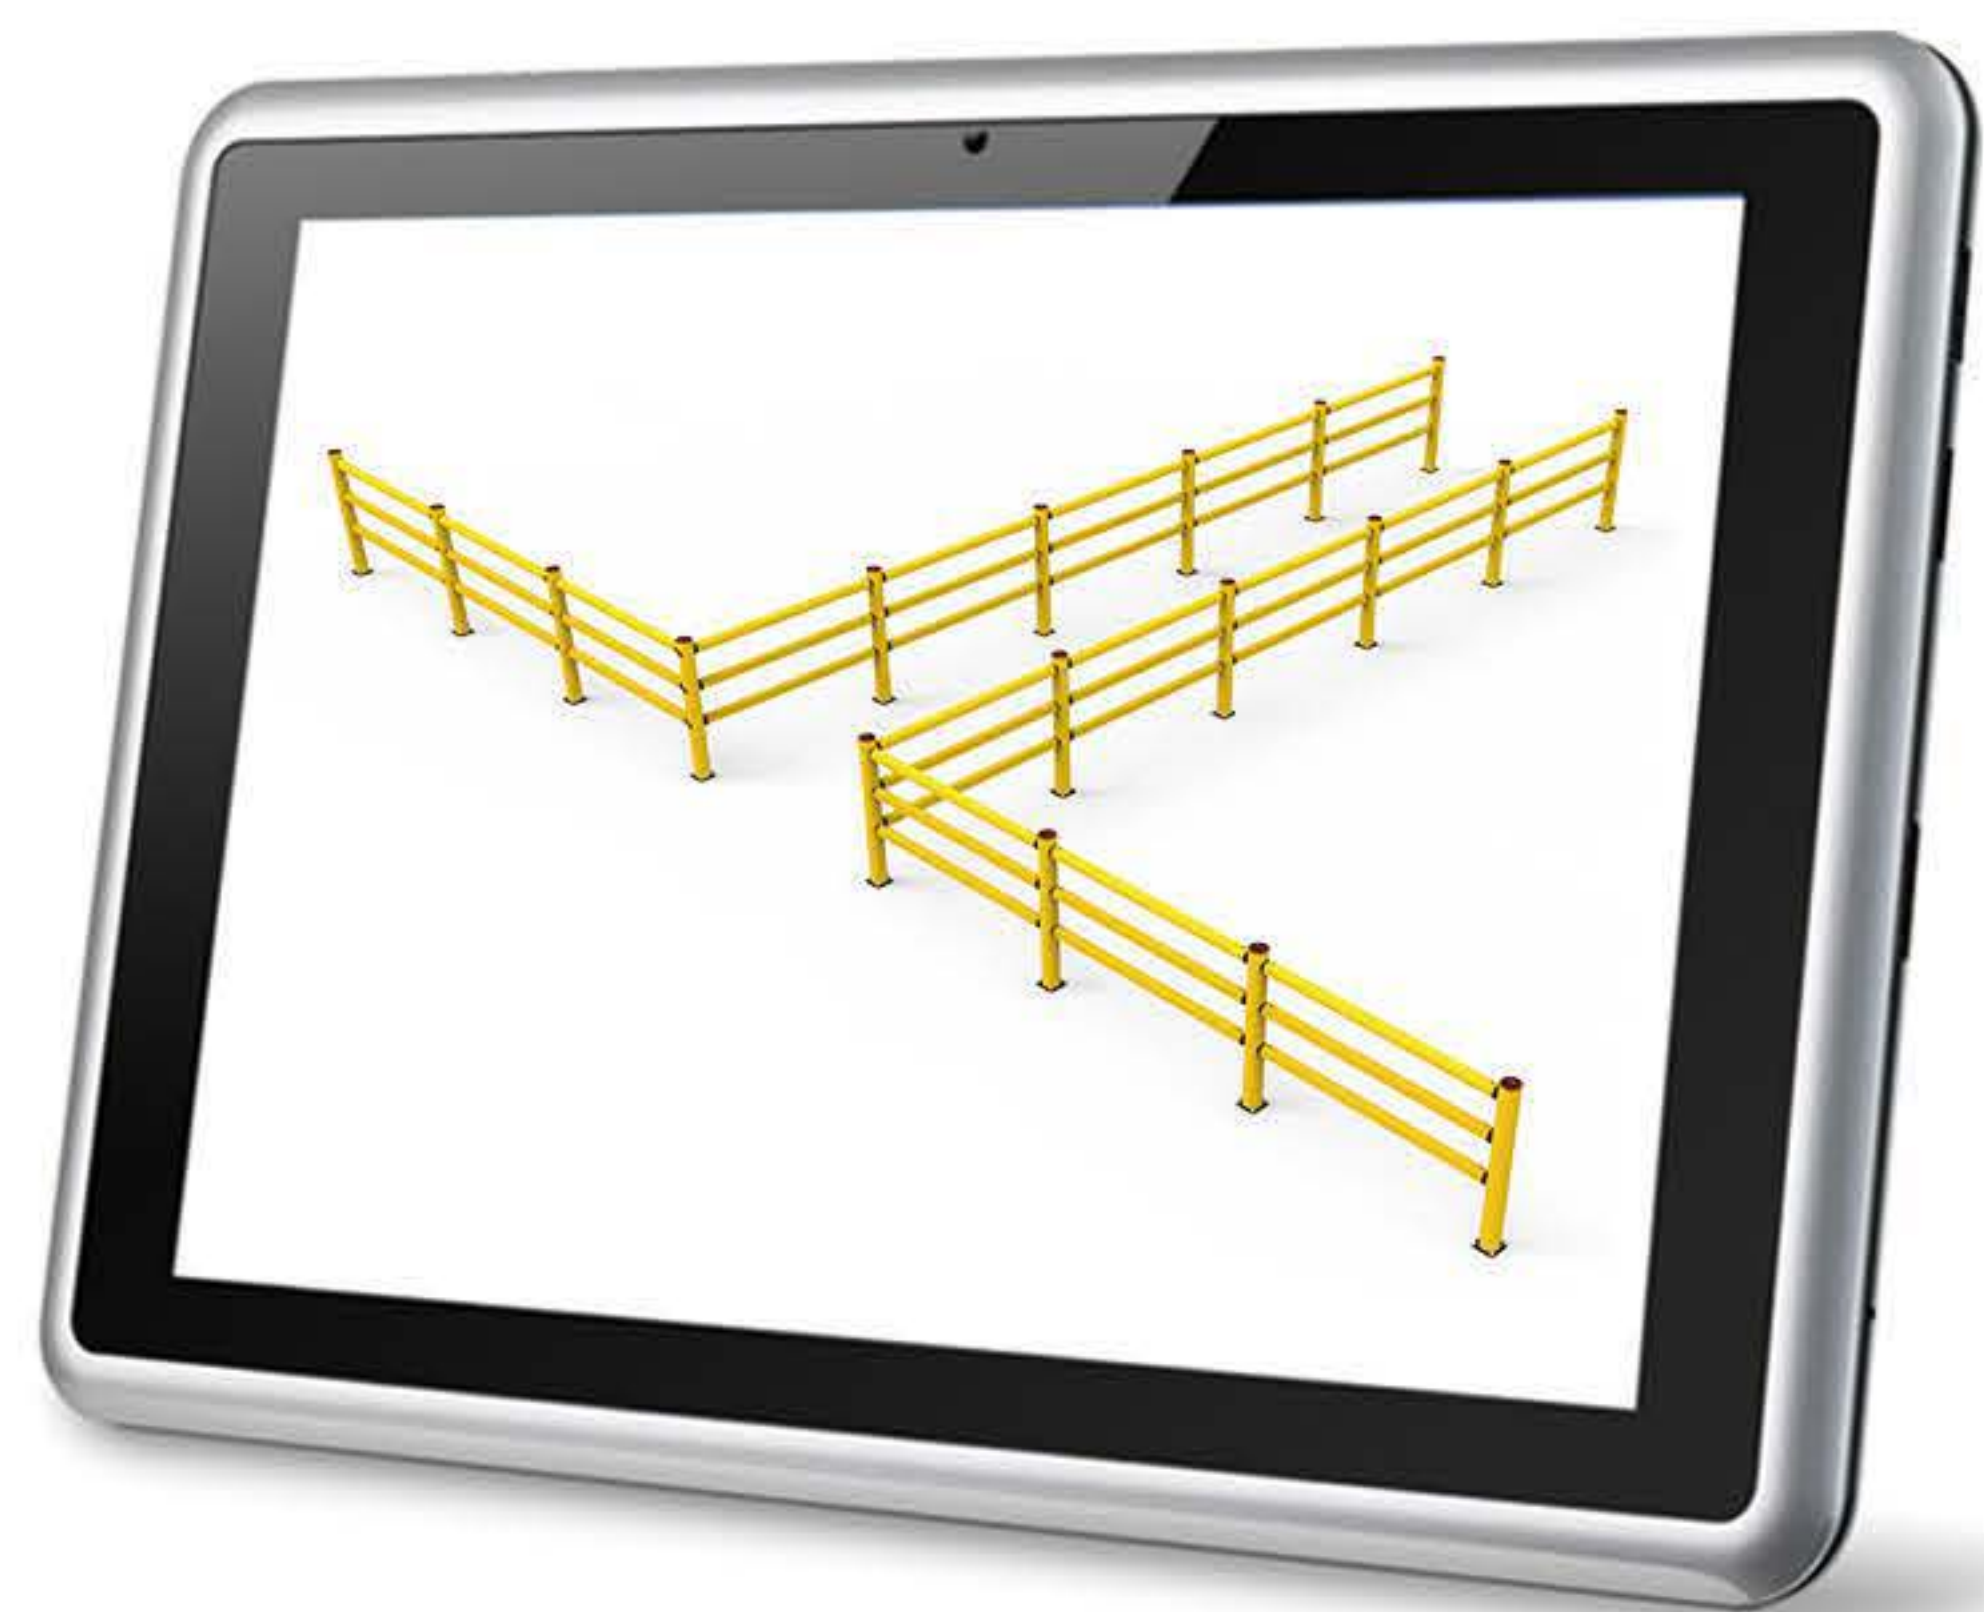

◆ 高效的選型軟體 | EFFICIENT SELECTION SOFTWARE

自主開發的選型軟體可讓客戶需求快速展現，解放客戶設計人員精力，自動生成產生明細，高效、直觀、準確，實現快速交付。


The self-developed selection software can quickly display customer needs, liberate the energy of customer designers, and automatically generate product details, which are efficient, intuitive and accurate, and achieve rapid delivery.

產品系列

PRODUCT SERIES

標準護欄

STANDARD BARRIERS

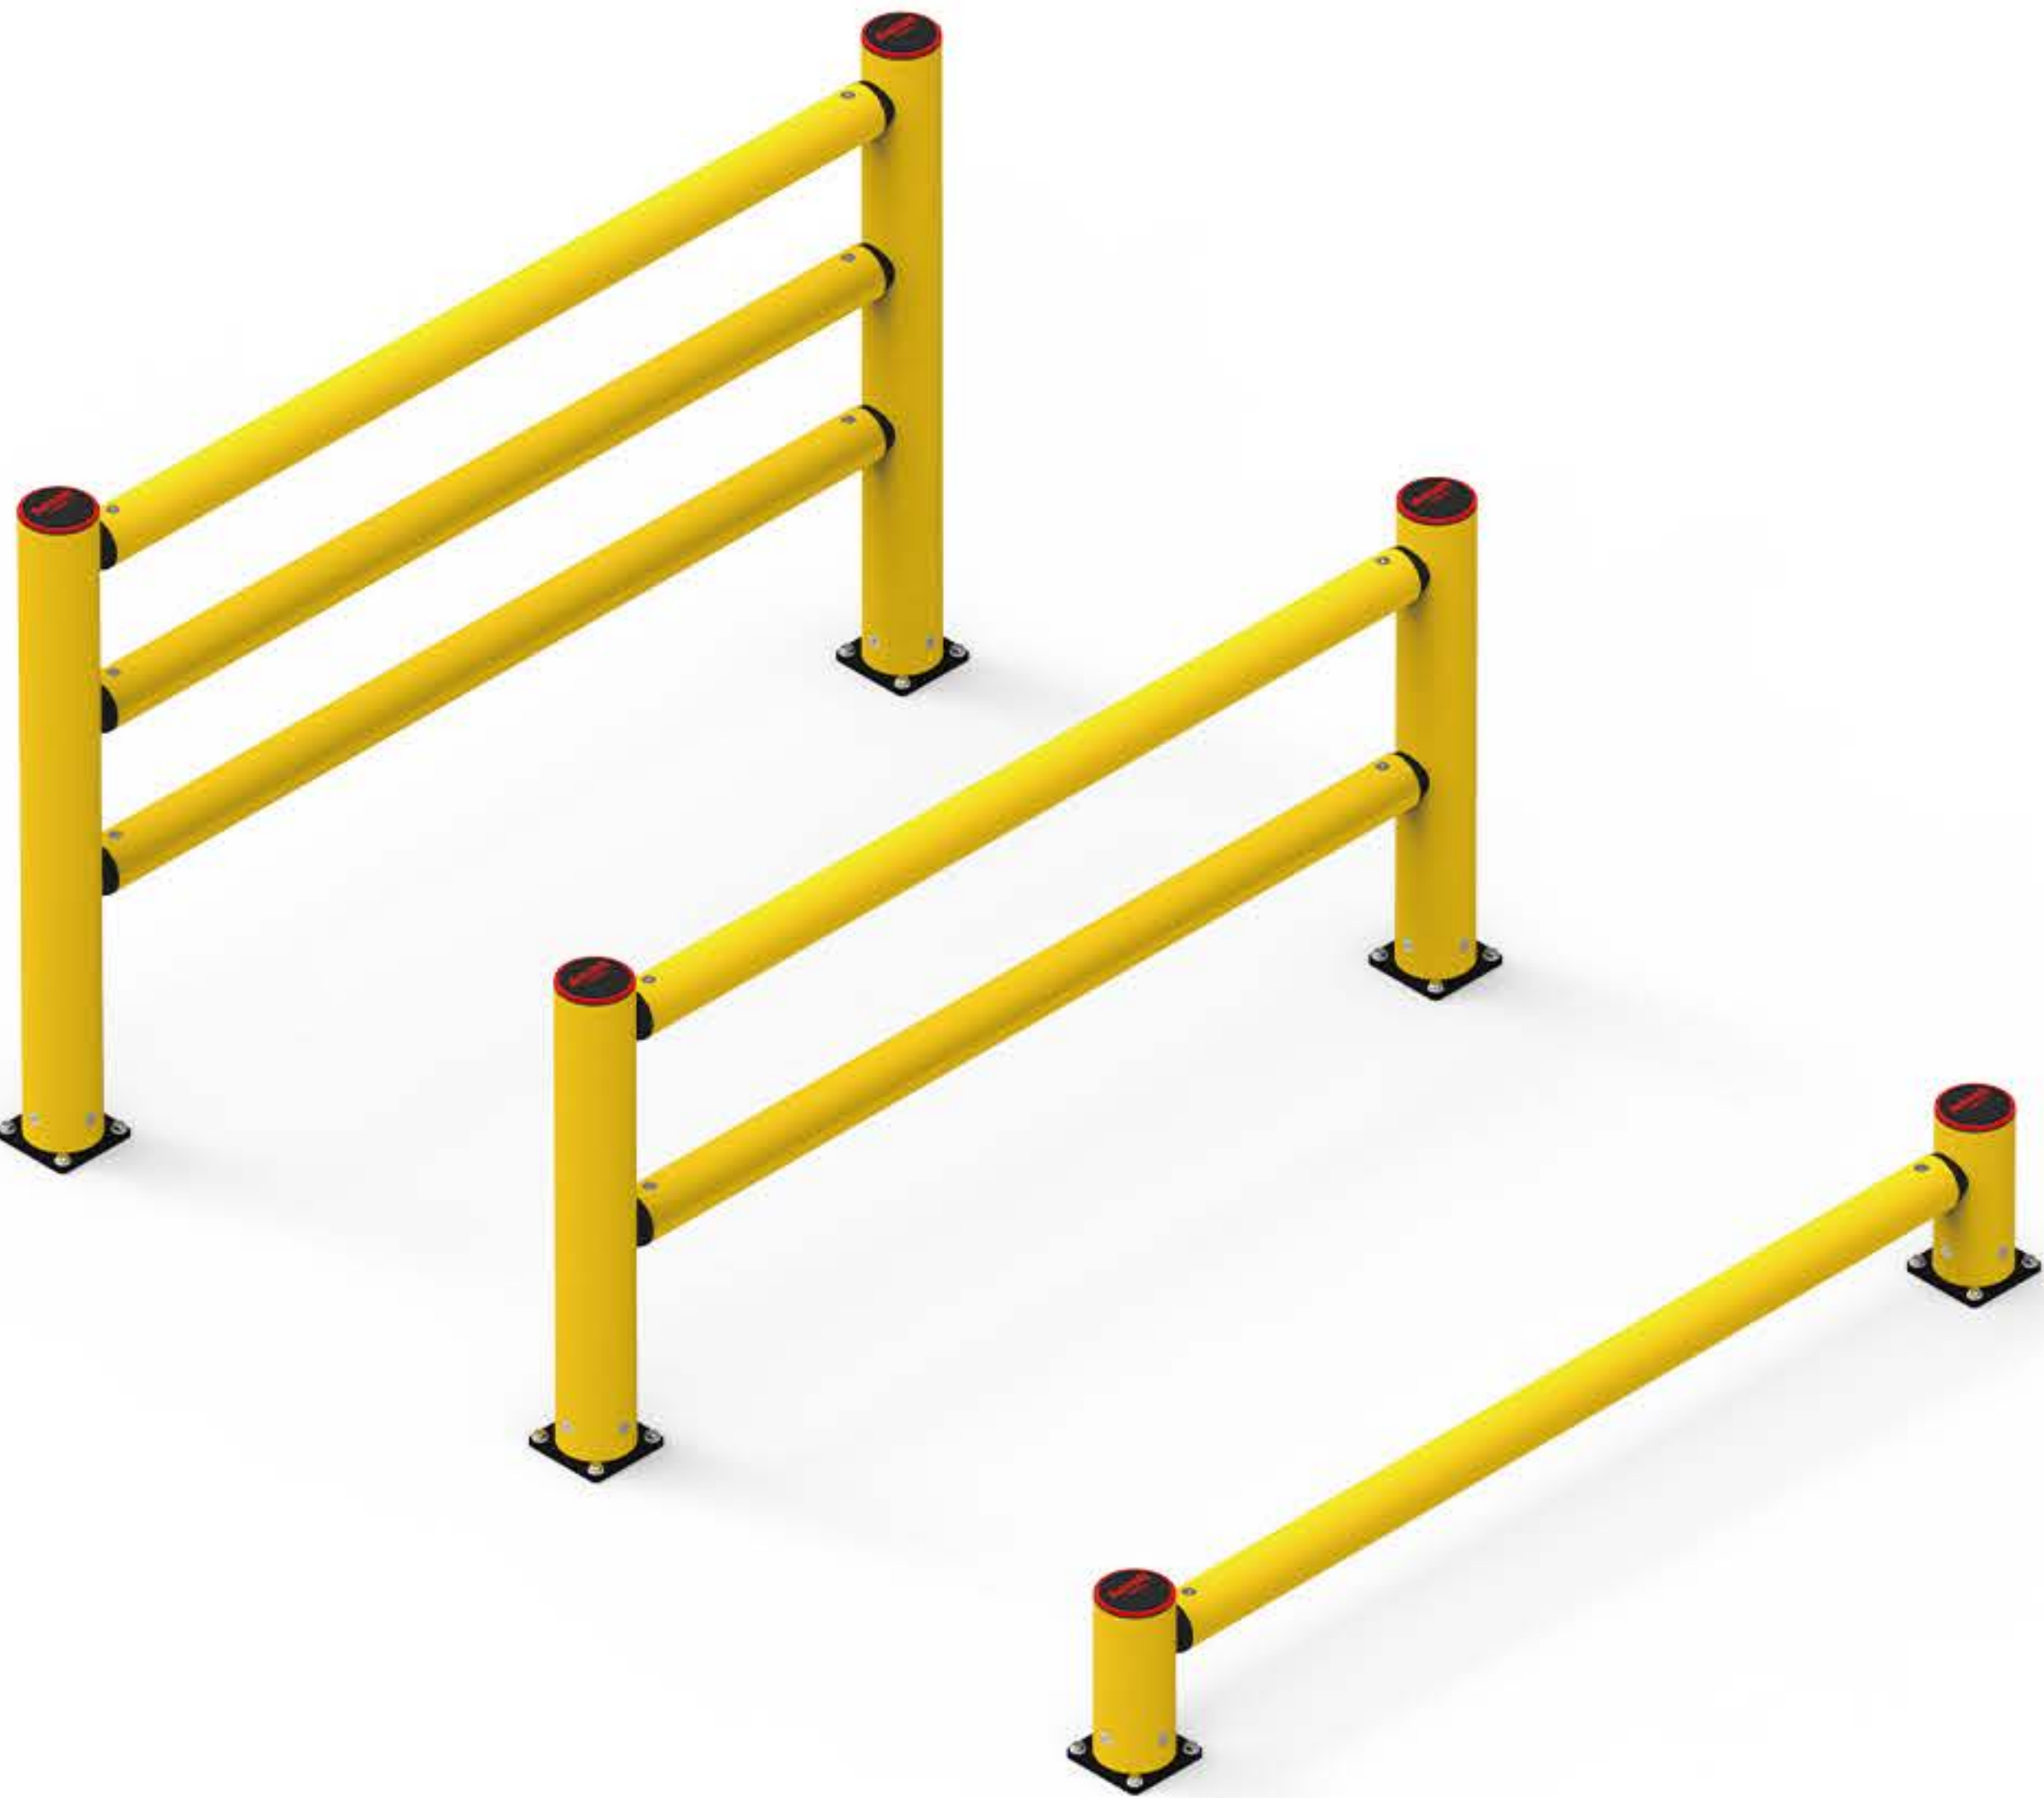

規格參數

Specification

- 護欄長度 600-1800mm（標準1800mm，中心到中心）
- 護欄高度 300/800/1100mm
- 護欄外徑 125mm
- 橫梁外徑 90mm
- 防護能力 1.5T、5km/h
- 產品顏色 黃色
- Barrier length 600-1800mm (standard 1800mm / center to center)
- Barrier height 300/800/1100mm
- Bollard outer diameter 125mm
- Beam outer diameter 90mm
- Capacity 1.5T, 5km/h
- Product color Yellow

強化護欄

REINFORCED BARRIERS



規格參數

Specification


- 護欄長度 600-1800mm（標準1800mm，中心到中心）
- 護欄高度 500/800/1300mm
- 護欄外徑 125/160mm
- 橫梁外徑 90/160mm
- 防護能力 3T、6km/h
- 產品顏色 黃色
- Barrier length 600-1800mm (standard 1800mm / center to center)
- Barrier height 500/800/1300mm
- Bollard outer diameter 125/160mm
- Beam outer diameter 90/160mm
- Capacity 3T, 6km/h
- Product color Yellow

產品系列

PRODUCT SERIES

防撞柱

BOLLARDS

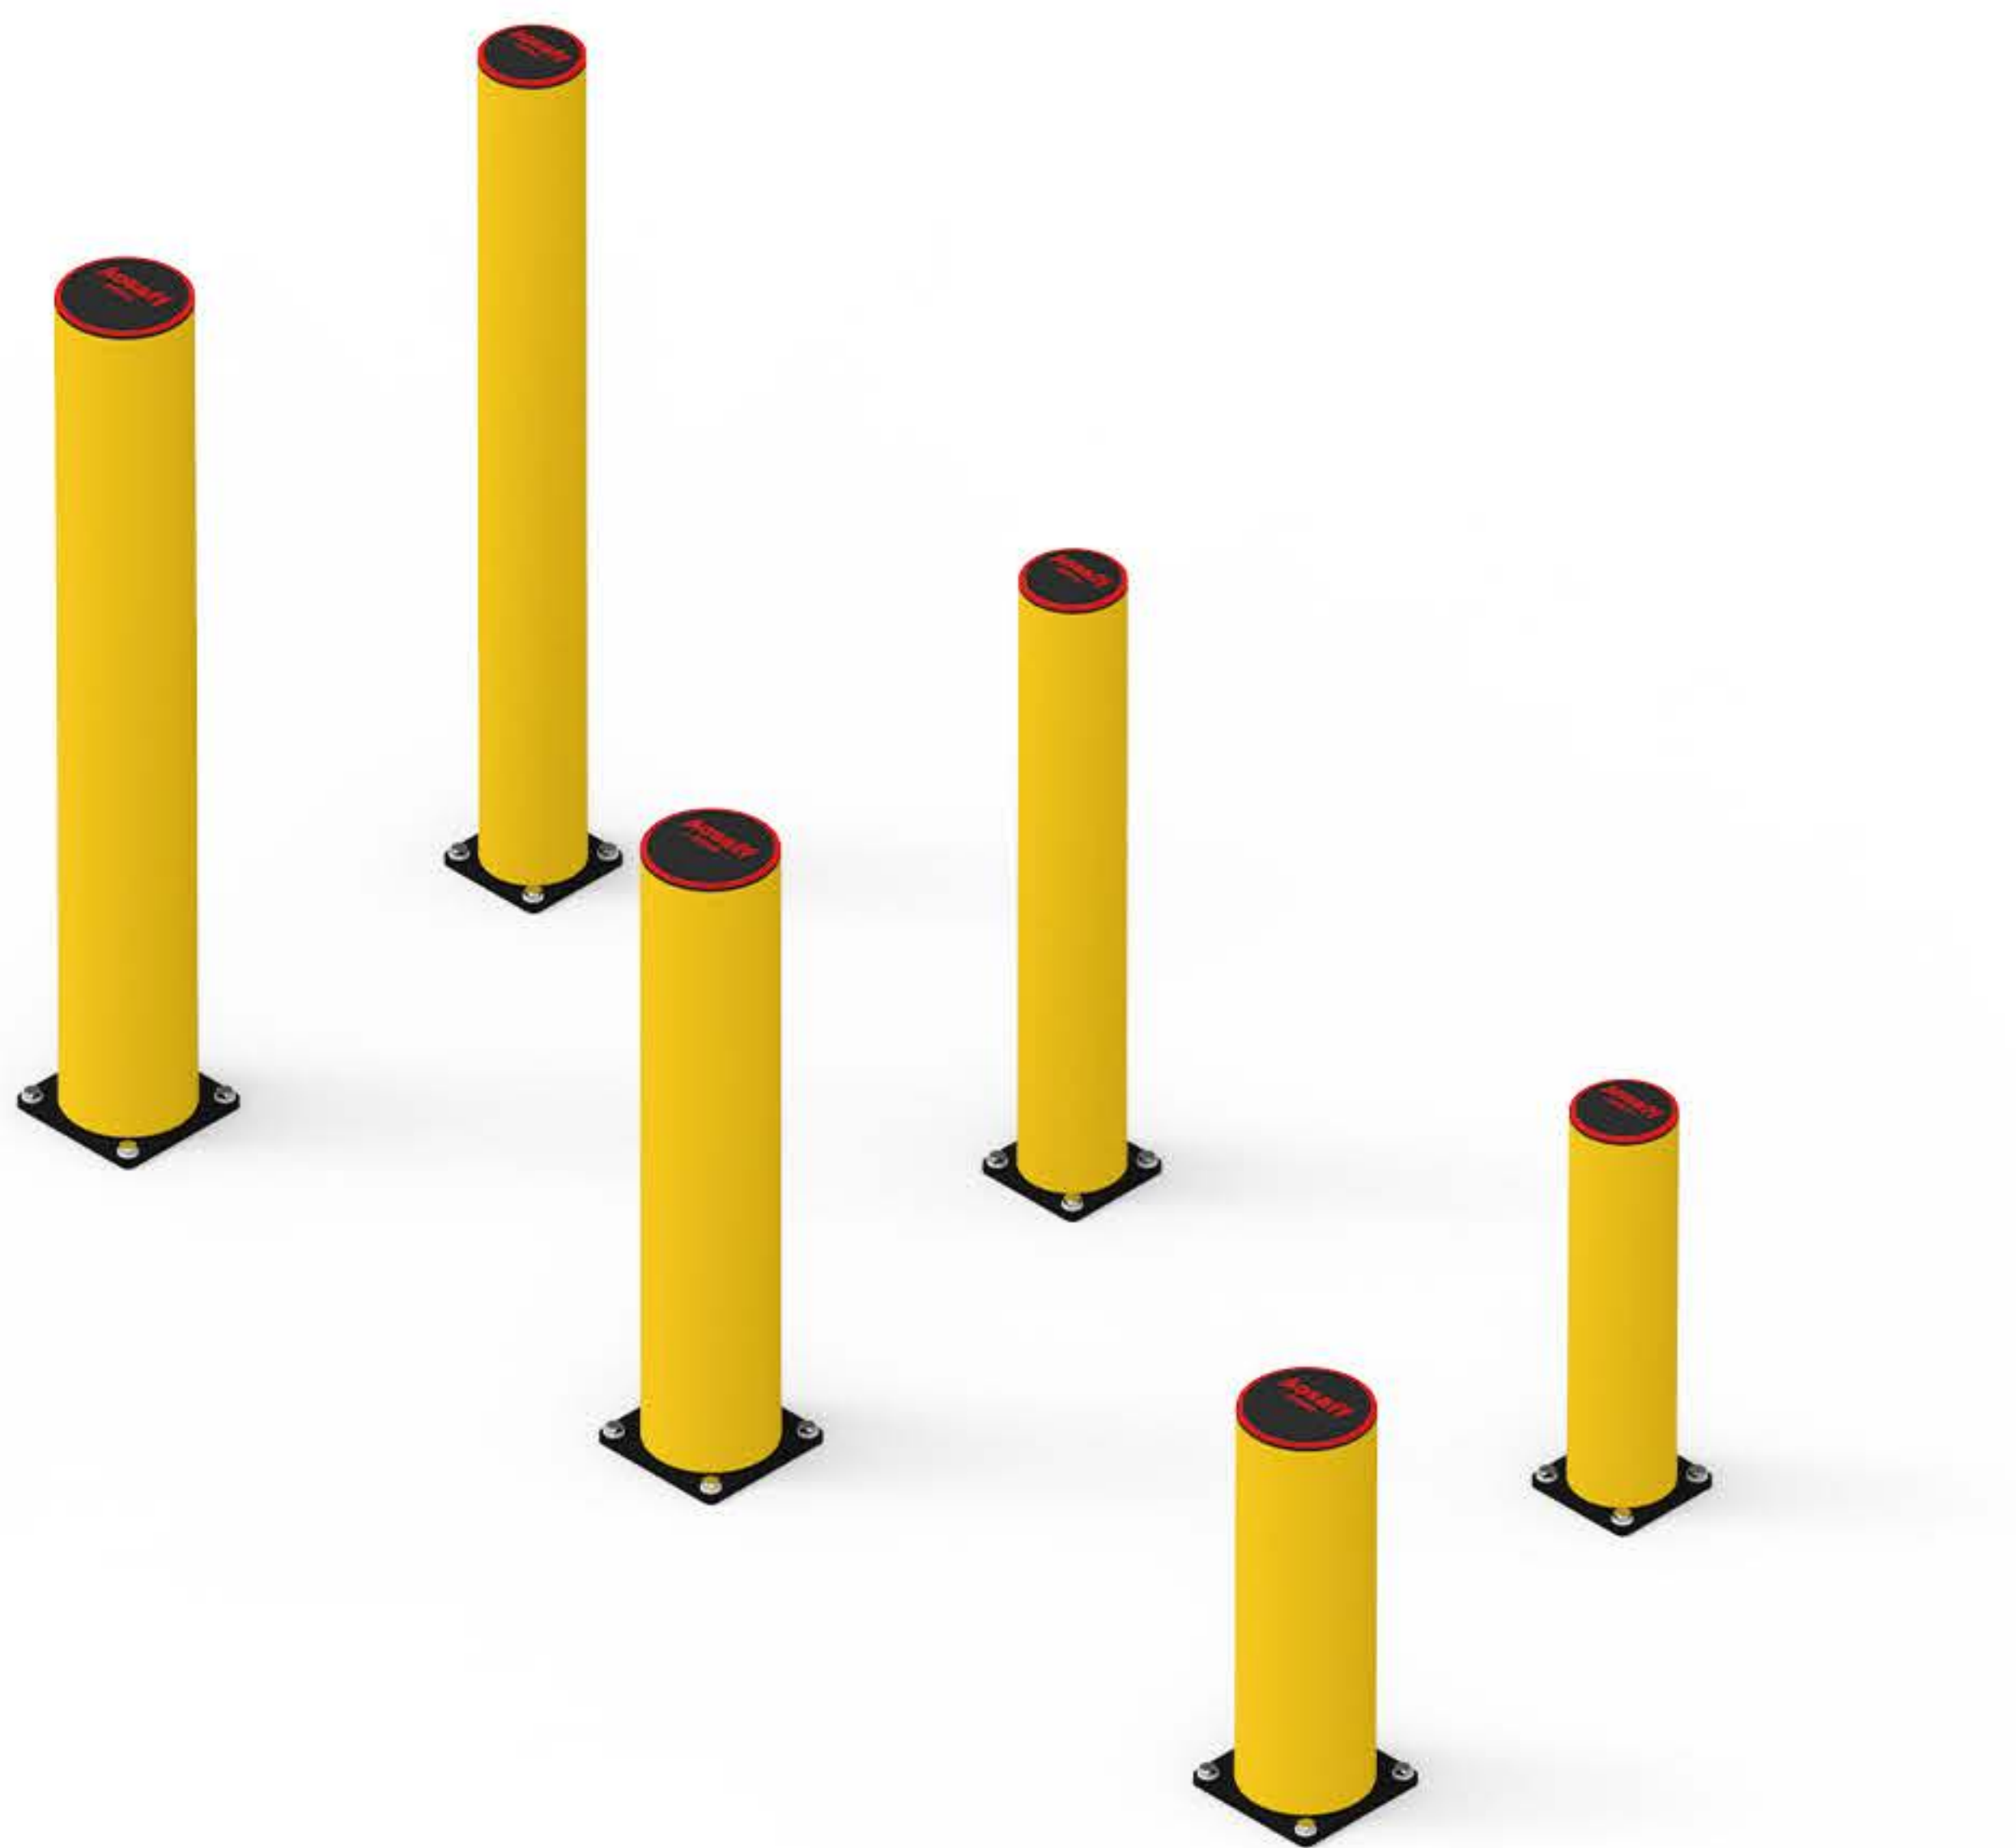

規格參數

Specification

- 護欄高度 500/800/1100mm
- 護欄外徑 125/160mm
- 防護能力 1.5T、4km/h | 3T、4.5km/h
- 產品顏色 黃色
- Barrier height 500/800/1100mm
- Bollard outer diameter 125/160mm
- Capacity 1.5T, 4km/h | 3T, 4.5km/h
- Product color Yellow

地欄

GROUND IMPACT BARRIERS



規格參數

Specification

- 地欄長度 600-2000mm (標準2000mm)
- 地欄高度 155/190mm
- 地梁外徑 125/160mm
- 防護能力 1.5T、4km/h | 3T、4.5km/h
- 產品顏色 黃色
- Barrier length 600-2000mm (standard 2000mm)
- Barrier height 155/190mm
- Beam outer diameter 125/160mm
- Capacity 1.5T, 5km/h | 3T, 4.5km/h
- Product color Yellow

應用場景

APPLICATION

