




## AKE

## 換向模組 90 度

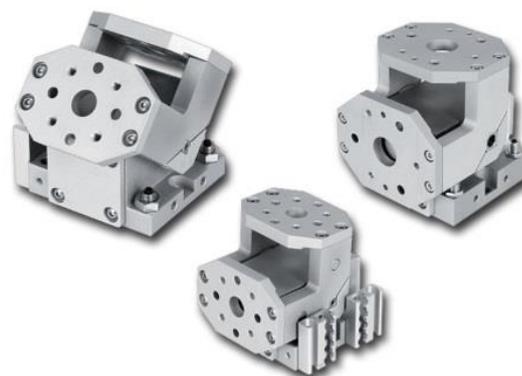

## 產品規格

型號	AKE-18	AKE-25	AKE-32	AKE-40	AKE-50
項目\缸徑 mm	Ø18	Ø25	Ø32	Ø40	Ø50
作動形式	複動式				
使用流體	空氣				
使用壓力範圍kgf/cm <sup>2</sup>	1.5 ~ 7 (150 ~ 700)				
使用溫度範圍°C	0 ~ 50				
接管口徑	M3x0.5	M5x0.8		PT1/8	
迴轉時間(sec / 90°)	0.3	0.4	0.6	0.8	1
扭矩kgf · cm	0.7xP	1.9xP	4xP	7xP	15xP
旋轉角度°	90				
角度調整範圍°	±3				
容許運動能量(J)	0.025	0.081	0.32	0.56	1
磁石裝置	附磁石裝置				
※註：扭力欄的P表示進氣壓力(kgf/cm <sup>2</sup> )					




## 訂購代號

AKE 18-AM-AMS-L 2- SIN-M8 2-A2

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①

**機種仕樣**



AKE系列  
90°換向模組


②

**缸徑**

18 : Ø18mm
25 : Ø25mm
32 : Ø32mm
40 : Ø40mm
50 : Ø50mm

③

**緩衝裝置**



AM

無記號：  
不附內藏式緩衝功能

**AM**  
附內藏式緩衝功能  
(限缸徑Ø)5以上選用)

### ④ 感應器裝置

AMS-□



L-出線為水平(直的)  
V-出線為垂直(90°)

型號:

M-二線式無接點  
N-三線式無接點(NPN)  
P-三線式無接點(PNP)  
電線長度-L: 2000mm

⑤

代號	感測器數量
1	附 1 個
2	附 2 個

### ⑥ 近接開關

型號 :

E2E-X1R5E1 : 三線式(NPN)

E2E-X1R5F1 : 三線式(PNP)

E2E-X2D1-N-Z : 二線式


電線長度-L : 2000mm



⑦

代號	感測器數量
1	附 1 個
2	附 2 個

### ⑧ 油壓緩衝器

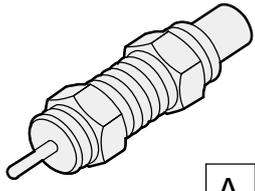

A 2

無記號：附調整螺絲


**A**：油壓緩衝器

**2**：油壓緩衝器數量


1: 1個 油壓緩衝器  
2: 2個 油壓緩衝器





迴轉角度

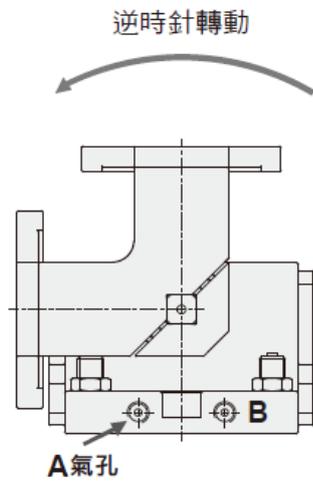

A氣孔進氣時，逆時針轉動

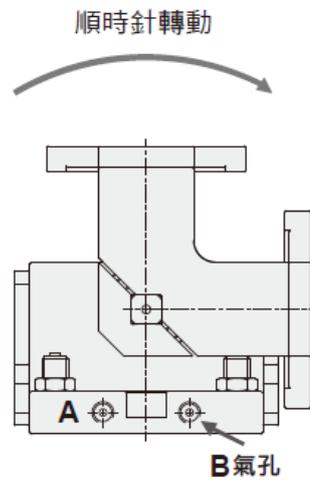


B氣孔進氣時，順時針轉動

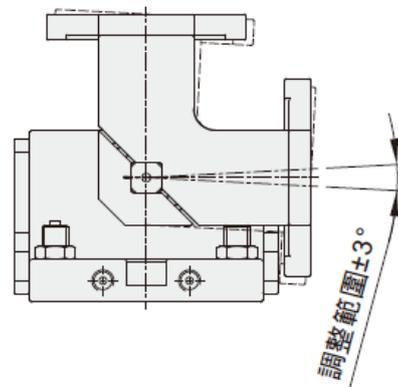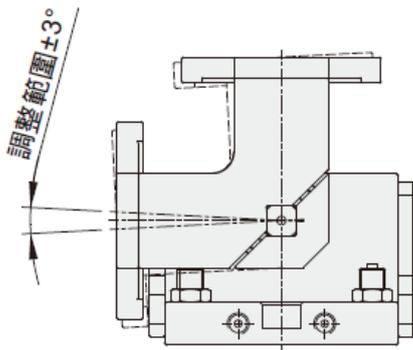




## 外觀尺寸


### AKE-18

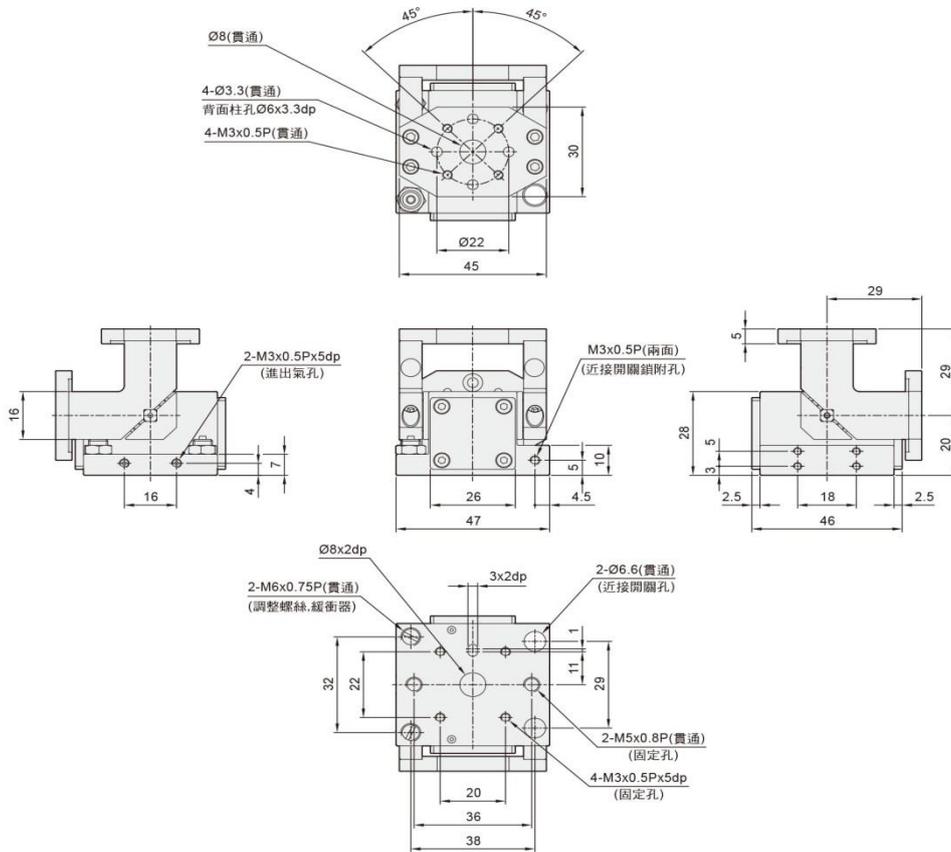

### AKE 18-S (感應型需外接感應器固定座)

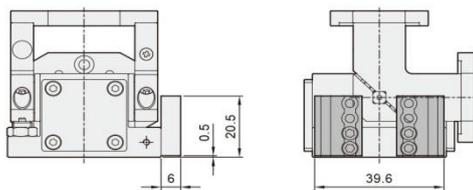


### ■ 外接緩衝器尺寸示意圖

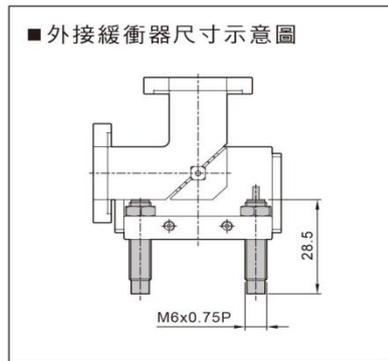




■ AKE-25(-S)

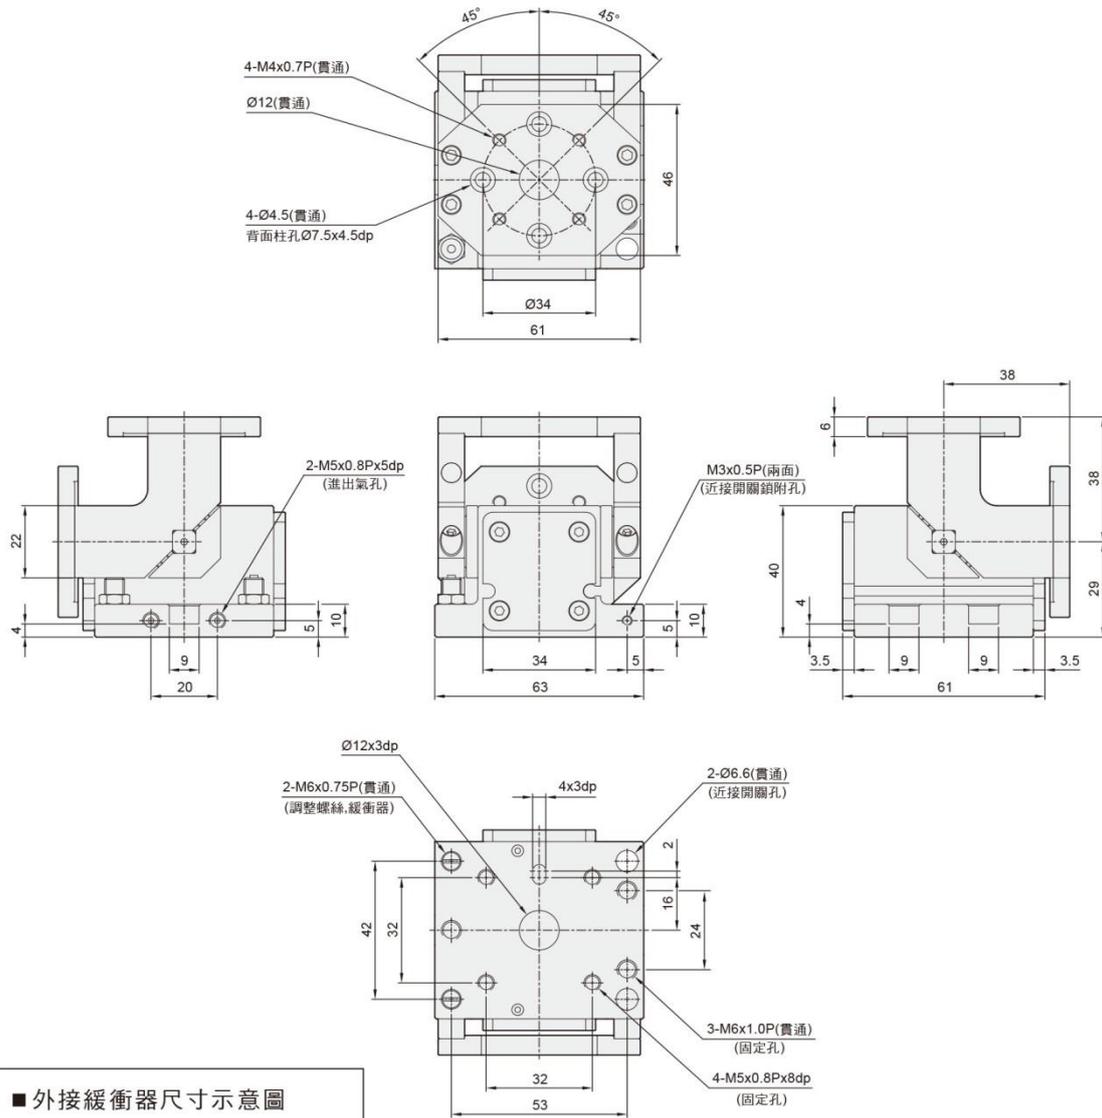


■ 外接緩衝器尺寸示意圖

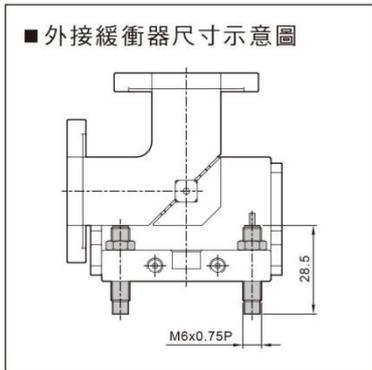




## ■ AKE-32(-S)

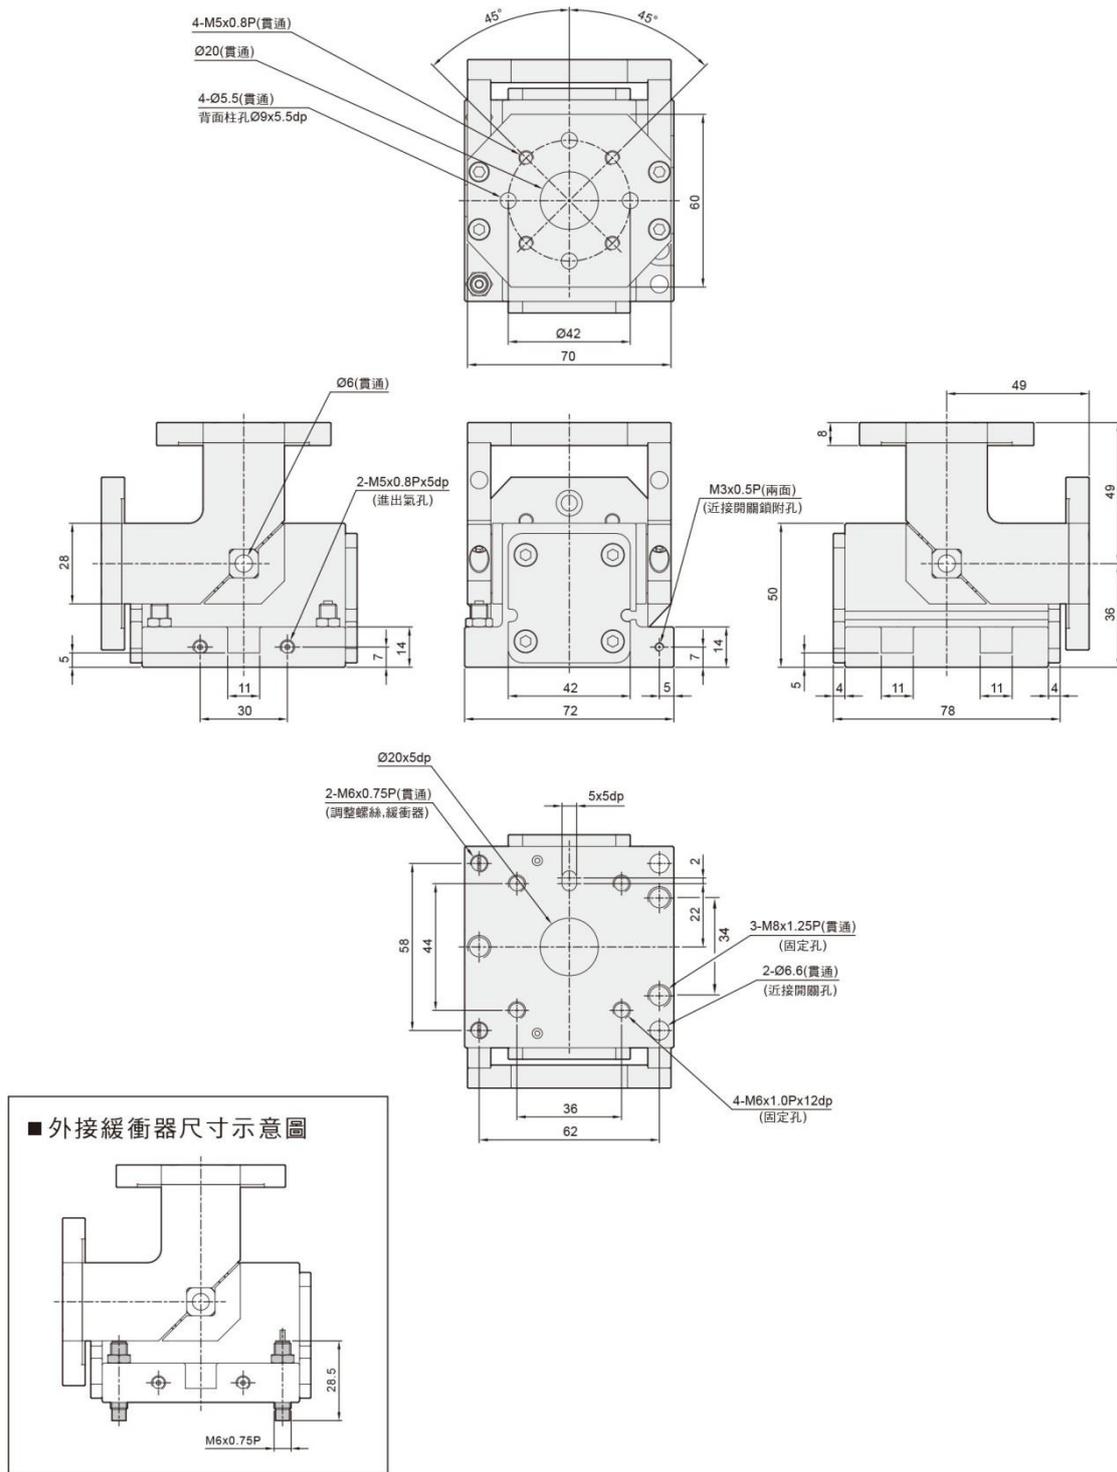



■ AKE-40(-S)

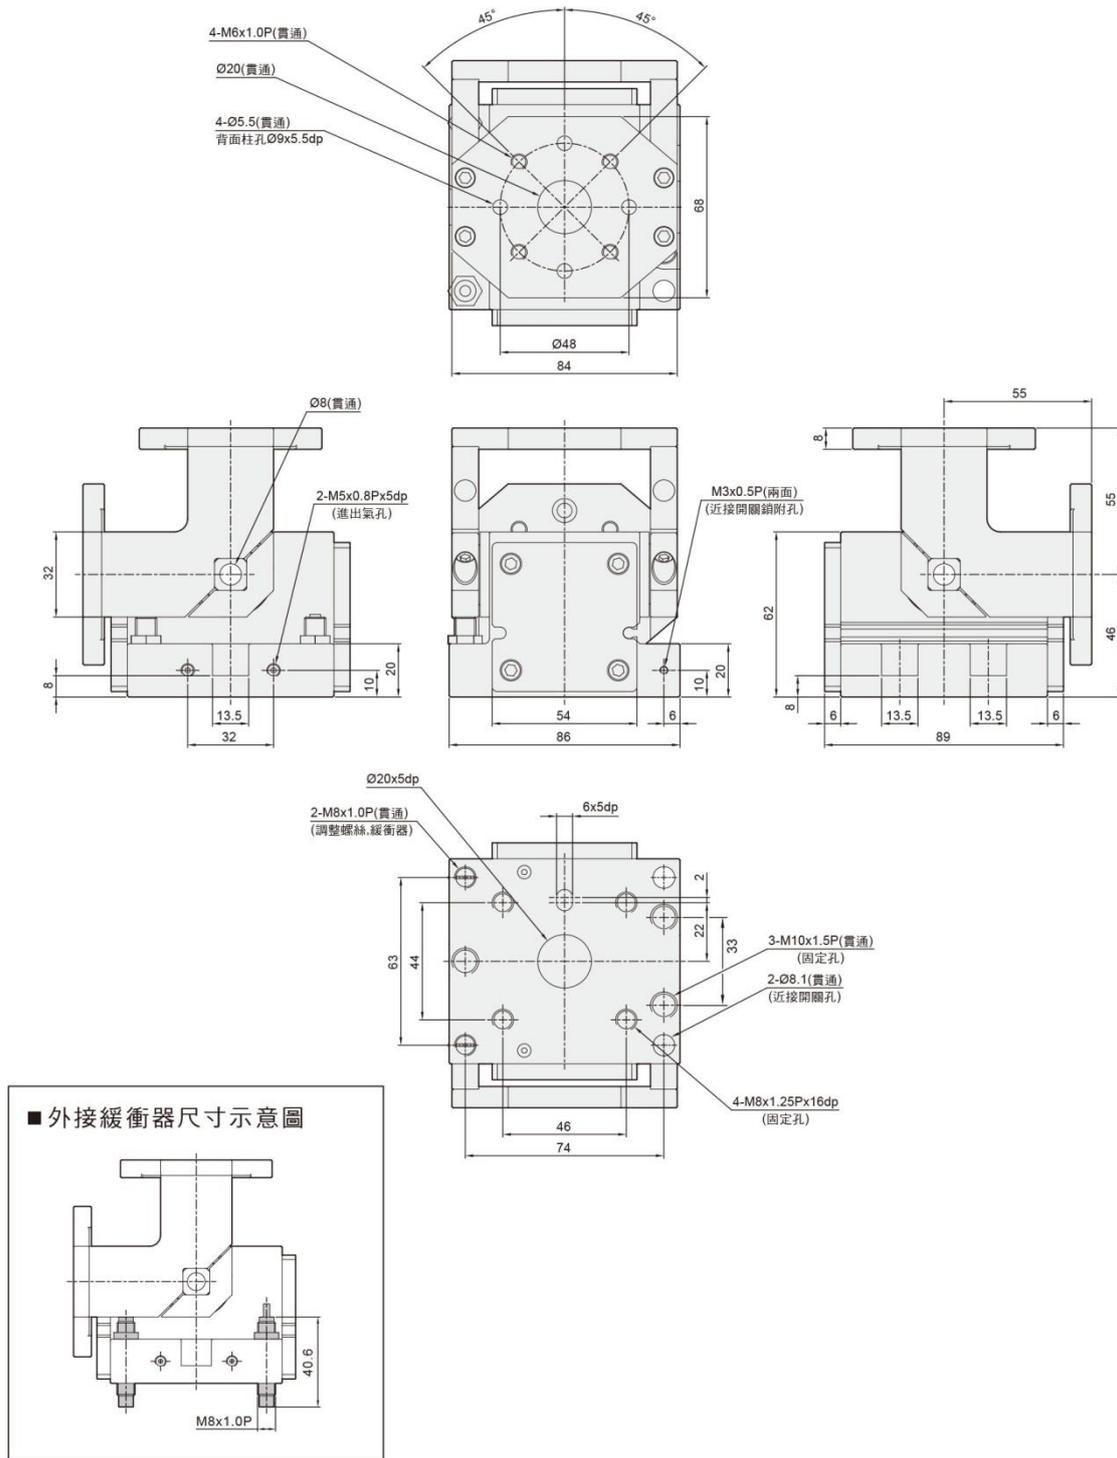



## ■ AKE-50(-S)

