

CVE Vacuum Pumps/Generator Transport



Features

- This is a single-stage vacuum generator with adjustable suction flow, suitable for the intake and discharge of granular materials or small debris.

Maximum vacuum level	-84kPa
Maximum vacuum flow	3390l/m
Supply air pressure	4-6 bar, maximum 7 bar
Supply air type	Dry compressed air

Order Code

CVE - 250 - AL
 ① ②


① Specifications

250	500
375	750

② Material

AL - Aluminum
SS - Stainless Steel

Dimensions (mm)

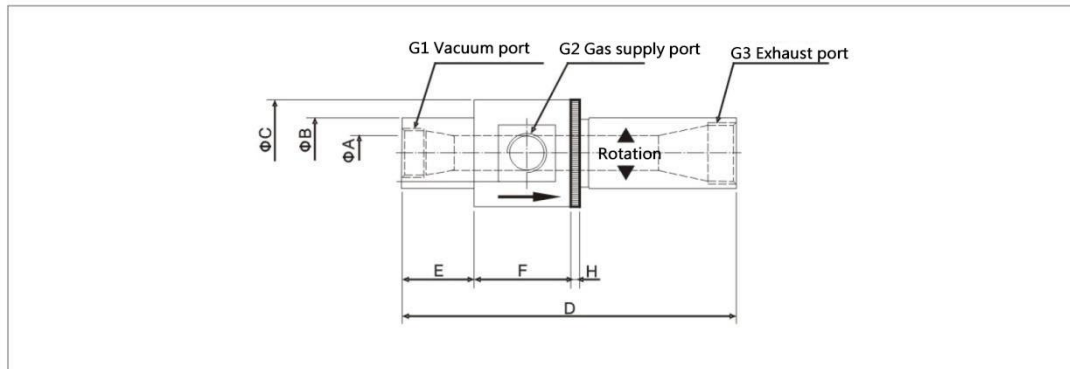

Model	Dimension specifications									
	ØA	ØB	ØC	D	E	F	H	G1	G2	G3
CVE250	6.5	19	32	94-105	22	32	5	G1/4	G1/8	G1/4
CVE375	9.5	25	45	155-165	38	45	5	G1/2	G3/8	G1/2
CVE500	13	32	51	155-160	38	51	5	G1/2	G3/8	G3/4
CVE750	19	38	58	175-189	38	51	5	G3/4	G1/2	G1

Model	air supply pressure bar	The vacuum flow (l/m) at different vacuum levels (-kPa) in the CVE series				
		17	34	50	68	84
CVE250	5.5	112	169	233	276	342
CVE375		176	327	485	595	825
CVE500		340	625	795	940	1280
CVE750		650	875	1250	1790	2550

Model	The vacuum flow (l/m) at different vacuum levels (-kPa) in the CVE series				
	17	34	50	68	84
CVE250	280	240	200	162	125
CVE375	846	735	620	520	395
CVE500	1695	1325	1130	990	650
CVE750	3390	2460	1970	1440	1130