



UN-180V Oilless Vacuum Pump



Vacuum: 680mmHg

Flow: 170LPM

UN-180V oilless vacuum pump is ideal for manufacturing and industrial markets applications, but should be considered for specific medical, laboratory, and Food & Beverage applications as well. Max Vacuum : 680mmHg Max Flow : 170LPM


Feature

- CE/RoHS Certification, All Wetted Aluminum, Non-lube Piston and Cylinder, Low Vibration, Parts Treated For Corrosion Protection From Moisture, One Year Warranty Provided
- Application : Laminator/LED test machine, Robotic arms, Vacuum packing, Milker Machine, Fitting/packaging machine, Medical/Dental offices, Laboratory and Workshop Applications
- Certification : CE EMC Certification 、
EN 55014-1:2006+A1:2009+A2:2011 、 EN 55014-2:2015 、
EN 61000-3-2:2014 、 EN 61000-3-3:2013 、 CE LVD Certification 、
EN 60335-1: 2012+A13:2017 、
EN 60335-2-80: 2003+A1:2004+A2:2009 、 RoHS Certification

Specifications

規格項目 SPEC	單位 UNIT	規格值 SPEC.Value
電壓 Rated Voltage	V	AC 110 or 220
最大真空度 Max.Vacuum	mmHg	680
最大流量 Open Flow	LPM	170(60Hz) / 158(50Hz)
消耗功率 Power Consumption	W	500
外型尺寸 Dimension	mm	250 x 128 x 203
安裝尺寸 Installation Size	mm	203.5 x 89 x M6
安裝口徑 I.D. of screw thread	PT	1/4"
重量 Weight	kg	9.2
重量 Weight	kg	3

Performance

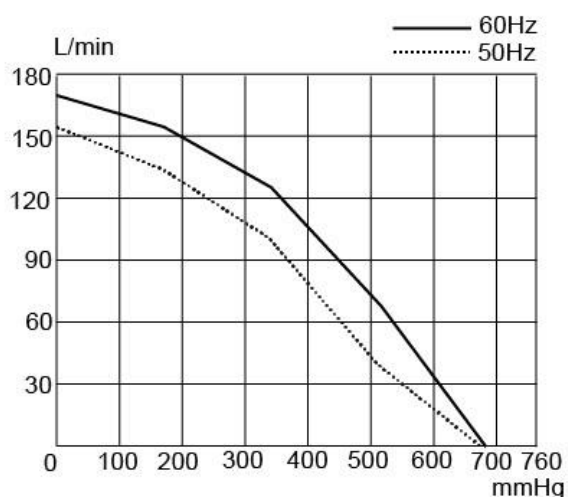

Dimensions

