



UN-90V Oilless Vacuum Pump

AC 110V or 220V

Max Vacuum: 680mmHg

Max Flow: 90LPM



UN-90V oilless vacuum pump is ideal for manufacturing and industrial markets applications, but should be considered for specific medical, laboratory, and Food & Beverage applications as well. Max Vacuum : 680mmHg Max Flow : 90LPM


Feature

- Oil-less operation, Non-lubricated piston and cylinder (Clean air stream, less maintenance), Easily replaced piston seal, Balanced for smooth, low vibration operation, Light weight die-cast aluminum components, Permanently lubricated bearings, Stainless steel valves, Twin fans provide cooling air through and around motor and cylinders, All wetted aluminum parts treated for corrosion protection from moisture, Thermally protected permanent split capacitor AC motors, One Year Warranty Provided
- Application : Semiconductor automation equipment, Vacuum packaing, spin coater, Labeling machine, Robotic arms.
- Certification : CE EMC Certification
EN 55014-1:2006+A1:2009+A2:2011
EN 55014-2:2015 、 EN 61000-3-2:2014 、 EN 61000-3-3:2013
CE LVD Certification 、 EN 60335-1: 2012+A13:2017
EN 60335-2-80: 2003+A1:2004+A2:2009 、 RoHS Certification

Specifications

規格項目 SPEC	單位 UNIT	規格值 SPEC.Value
電壓 Rated Voltage	V	AC 110 or 220
最大真空度 Max.Vacuum	mmHg	680
最大流量 Open Flow	LPM	90(60Hz) / 80(50Hz)
消耗功率 Power Consumption	W	250
外型尺寸 Dimension	mm	250 x 128 x 184
安裝尺寸 Installation Size	mm	203.5 x 89 x M6
安裝口徑 I.D. of screw thread	PT	1/4"
重量 Weight	kg	7.8
重量 Weight	kg	3

Performance

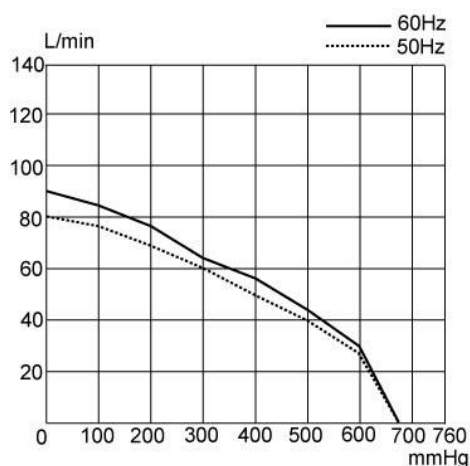

Dimensions

