



MP2-AN Vacuum suction cup

-Traceless Static-proof

Size: 0.8–1.1mm

Material: N, S, GN, GS, GHN



3C product




AN - Nozzle

Introduction

- Unique nozzle gripper design
- Very small diameter of the suction cup
- Special static-proof material
- Can grip small workpieces quickly
- A mini suction cup suitable for the application in which product installation position is limited


Application

- Applicable to handling small electronic components and metal sheets
- Applicable to handling small-sized light weight workpieces
- The special static-proof material is applicable to the 3C product industry



Structure

- (1) Joint
- (2) Gasket
- (3) Gripper



purchase guide


MP2 - 08 AN N - A5

- ① ② ③ ④ ⑤


① Product series	② Size specification	③ Shape specification	④ Material of suction cup	⑤ Joint specification
MP2	08 - ϕ 0.8mm 11 - ϕ 1.1mm	AN - Nozzle	N-nitrilerubber S- siliconerubber GN - static-proofnitrilerubber (Staticresistanceindex: 10^5 - 10^9) GS - static-proofsiliconerubber (Staticresistanceindex: 10^5 - 10^9) GHN - tracelessconductive nitrilerubber (Staticresistanceindex: 10^5 - 10^9)	Null - Bare suction cup A5 - M5 \times 0.8 male thread

Design parameters


MP2-08 AN□

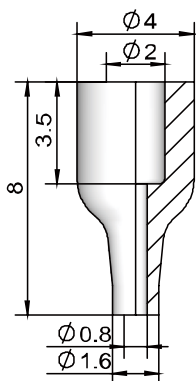

MP2-11 AN□


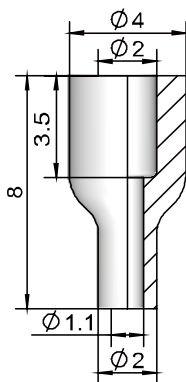


MP2A-Z21P(joint)



MP2-08 AN □ -A5 (M5 \times 0.8 male thread)

MP2-11 AN □ -A5 (M5 \times 0.8 male thread)

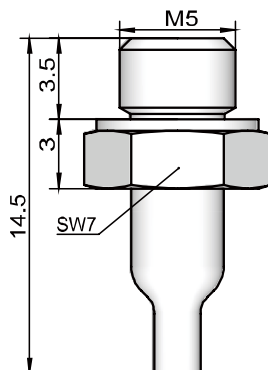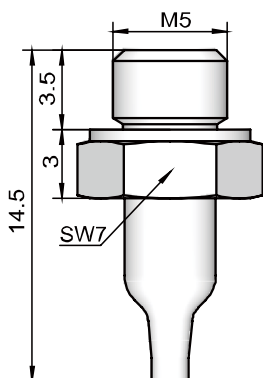

Model	(mm) weight g	Applicable joint model
MP2-08 AN □ -A5	0.58	MP2A-Z21P
MP2-11 AN □ -A5	0.58	MP2A-Z21P